

Overview of elements 2024



Ordering Information | Dimensional drawings

Ordering correctly

Necessary Order Information

Complete and accurate data is absolutely necessary for the processing and production of your order, since an accurate and clear order allows us to immediately begin processing your order without time-consuming enquiries.

For this reason, your order must contain the following information:


- · Range name and front number
- Handle number
- · Drill pattern number
- Carcase colour number
- Plinth height and colour

(if not specified, the standard plinth height of 150 mm will be supplied)

- · Worktop design / décor
- · Worktop edge design / edge colour
- Worktop sketch with dimensions and indication of tongue and groove joints
- Design of the worktop outer corner (for APD): square or round
- Upright / top shelf design including the colour number and upright thickness / Upright panel floor seal colour
- Shelf colours
- · Glass design and / or colour
- · Roll-up front colour
- Cornice profile / light pelmet profile including colour for each
- Order number and / or abbreviation
- · Manufacturer information and built-in appliance model identification
- Kitchen block number (for kitchen block orders)
- Layout sketch with dimension information in 1:20 ratio
- Please draw / write any special productions in the centre of the layout sketch

Dimensional drawings for upright panels

Uprights at end of run for base units, sideboards and tall units are supplied as standard with an upright panel shoe. The upright panel shoe is included in the price of the upright panel and is available in: 014 Stainless steel appearance, 010 Black. If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.



The height of the upright panel is reduced by the interior height dimensions of the profile and thus calculated as follows:

carcase height

- + plinth height
- 8 mm interior chamfering of the floor profile
- = material height

Base units

Carcase depth: 561 mm Carcase height: 720 mm

70, 100, 150 or 200 mm Plinth height:

Base units



Base unit

1 continuous door. 1 shelf

UD 20/30/40/45/50/60 cm



Base unit

1 pinned door. 1 shelf

U 20/30/40/45/50/60 cm



Base unit

2 continuous doors. 1 shelf

UD 80/90/100/120 cm



Base unit

2 pinned doors, 1 shelf


U 80/90/100/120 cm



Base unit

- 1 drawer 1 door
- 1 shelf

US 30/40/45/50/60 cm



Base unit

- 2 drawers. 2 doors,
- 1 shelf

US 80/90/100/120 cm



Base unit

- 1 drawer,
- 2 doors, 1 shelf

USG 80/90/100/120 cm



Pull-out unit

- 1 drawer,
- 2 pull-outs

UA 30/40/45/50/60/80/90/100/120 cm



Drawer unit

3 drawers, 1 pull-out

U3SA 30/40/45/50/60/80/90/100/120 cm



Pull-out unit

- 1 pull-out,
- 1 continuous front,
- 2 hanging baskets with wooden bottoms

UAMD 20/30 cm



Open shelf base unit

2 fixed shelves. side depth: 582 mm

UR 15/20/30/40/45/50/60 cm


Corner base units



Corner base unit

2 continuous doors. opening angle: 165°, 1 shelf

UDTE 80/90 cm



Corner base unit

2 pinned doors, opening angle: 165°, 1 shelf

UTE 80/90 cm



Corner base unit as carousel unit

2 continuous fronts, carcase height: 750 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



Corner base unit as carousel unit

2 pinned fronts carcase height: 750 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



Chamfered corner base unit

1 continuous door, 1 shelf

UED 80/90 cm



Chamfered corner base unit

- 1 pinned door, 1 shelf

Half corner base units



UED90-40 UED90-45 UED100-50 UED100-60

Corner base unit

- 1 continuous door 1 shelf,
- 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-40: ... 1050 (1030 - 1150) mm *90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm





UE90-40

UE90-45 UE100-50 UE100-60

1 drawer.

- 1 door,
- 1 shelf
- 1 angle filler Carcase widths: 900, 1000 mm

Planning dimensions (variable): 650 (630 - 750) x .. *90-40: ... 1050 (1030 - 1150) mm

*90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UEDSA90-45 UEDSA100-50 **UEDSA100-60**

Corner unit with swivel pull-out

1 continuous door, 2 tablar shelves with metal railing, height adjustable, 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UESA100-60

1 drawer

UESA90-45 UESA100-50

swivel pull-out

Corner unit with

- 1 door,
- 2 wooden swivel tablars with metal railing, height adjustable,
- 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ... *90-45: ... 1100 (1080 - 1200) mm

*100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UESAV90-45 UESAV100-50 UESAV100-60

Corner unit with swivel pull-out

1 pinned door. 2 tablar shelves with metal railing, height adjustable, 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



Surcharge for recessed fillers


on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly. carcase depth: 561 mm

Base units

Carcase depth: 561 mm Carcase height: 720 mm

70, 100, 150 oder 200 mm Plinth height:

Angle fillers



Angle filler

Continuous front material, 70 x 70 mm, planning dimensions: 650 x 650 mm

as above, however variable from 50 to 170 mm, planning dimensions: 630 - 750 mm 1st dimension = left / 2nd dimension = right



Surcharge for recessed fillers

on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm

Fillers / Panelling



Filler

Carcase material, 720 mm high, U-shaped seal for connection to wall, width: 100 / 200 mm





Front filler

Continuous front material, width: 200 mm





RK-72



Base unit back panel

16 mm thick, 720 mm high, width: 250 - 2000 mm, available in all carcase and worktop décors from décor group 1.

Vario clip fastening, in case of reproduction finishes vertical wood grain



RKS-72

as above, however, continuous height. including floor profile: 70 mm plinth height: 810 mm 100 mm plinth height: 840 mm 150 mm plinth height:

890 mm 200 mm plinth height:

940 mm

Available floor profile colours:

010 Black 014 Stainless steel appearance



Base unit back panel

1 continuous front design, 720 mm high, Vario clip fastening, without drill hole

RFD-72 30/40/45/50/60/80/90 cm

Cooker housing



Cooker housing

1 fixed panel,

side sections: 202 mm deep, aperture dimension: 591 mm

HU 60 cm



Cooker housing

1 fixed panel, aperture dimension: 598 mm

HUB 60 cm



Cooker housing

1 plastic drawer, 16 I capacity, interior dimensions: 485 x 480 x 68 mm, aperture dimension: 598 mm



Cooker housing

1 large-capacity drawer with second level for baking trays, plastic, 30 I capacity, interior dimensions: 480 x 380 x 150 mm. aperture dimension: 598 mm

Hot plate units



Hot plate unit

1 internal panel, 1 construction shelf for heat insulation. 1 door

KD60 60 cm

1 shelf



Hot plate unit

1 fixed panel, 1 construction shelf for heat insulation.

1 door. 1 shelf



Hot plate unit

1 drawer, 1 spacer shelf for hot plate,

1 door, 1 shelf

KS60 60 cm



Hot plate unit

1 drawer,

1 spacer shelf for hot plate, 2 pull-outs

KS2A 60/80/90/100/120 cm



Hot plate unit

1 internal panel, 1 construction shelf for heat insulation, 2 pull-outs

KD2A 60/80/90/100/120 cm

Sink units



Sink base unit

1 internal panel, 1 continuous door

SPUD 40/45/50/60 cm



Sink base unit

1 fixed panel, 1 door

SPU 40/45/50/60 cm



Sink base unit

2 internal panels, 2 continuous doors

SPUD 80/90/100/120 cm



Sink base unit

2 fixed panels, 2 doors

SPU 80/90/100/120 cm



SPUAD

1 continuous front with centred handle, without pull-out rails and

Sink base unit

1 internal panel.

drill holes



Sink base unit

drill holes

1 fixed panel. 1 front with centred handle, without pull-out rails and

SPUA 40/45/50/60 cm



SPUDA-ASK

45/50/60 cm



Sink base unit Separato-K

1 internal panel, 1 pull-out, 500 mm deep, with waste separation system

Separato-K with pull-out lid, 1 x 18 and 2 x 8 litres, 500 mm width: with 1 side organiser, 600 mm width: with 2 side organisers.

1 bio lid (for all widths)

Doors for integrated appliances



Door

for integrated dishwashers. without handle

GSB 45/60 cm



Continuous door

for fully integrated dishwashers, built-under fridge and freezer units with pull-outs



GSB*-I 45/60 cm

Pinned door

for fully integrated dishwashers, built-under fridge and freezer units with pull-outs

Base units in XL height

Carcase depth: 561 mm Carcase height: 792 mm

70, 100, 150 or 200 mm Plinth height:

XL Base units



XL Base unit

1 continuous door 2 shelves

UD*-X 20/30/40/45/50/60 cm



XL Base unit

1 pinned door. 2 shelves

U*-X 20/30/40/45/50/60 cm



XL Base unit

2 continuous doors. 2 shelves

UD*-X 80/90/100/120 cm



XL Base unit

2 pinned doors. 2 shelves

U*-X 80/90/100/120 cm



XL Base unit

1 drawer 1 door

1 shelf

US*-X 30/40/45/50/60 cm



XI Base unit

2 drawers.

2 doors, 1 shelf

US*-X 80/90/100/120 cm



XL Base unit 1 drawer,

2 doors 1 shelf

USG*-X 80/90/100/120 cm



XL Pull-out unit

1 drawer,

2 pull-outs

UA*-X 30/40/45/50/60/80/90/100/120 cm



XL Drawer unit

3 drawers.

1 pull-out

U3SA*-X 30/40/45/50/60/80/90/100/120 cm



XL Pull-out unit

1 pull-out,

1 continuous front,

2 hanging baskets with wooden bottoms

UAMD*-X 20/30 cm



XL Open shelf base unit

2 fixed shelves, side depth: 582 mm

UR*-X 15/20/30/40/45/50/60 cm

XL Corner base units



XL Corner base unit

2 continuous doors, opening angle: 165°, 2 shelves

UDTE*-X 80/90 cm



XL Corner base unit 2 pinned doors.

opening angle: 165°, 2 shelves

UTE*-X 80/90 cm



XL Corner base unit as carousel unit

2 continuous fronts, Unit height: 822 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



XL Corner base unit as carousel unit

2 pinned fronts Unit height: 822 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



XL Chamfered corner base unit

1 continuous door. 2 shelves

UED*-X 80/90 cm



XL Chamfered corner base unit

1 pinned door. 2 shelves

UE*-X 80/90 cm

XL Half-corner units



UED90-40-X UED90-45-X UED100-50-X UED100-60-X

XL Corner base unit

1 continuous door 2 shelves,

1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-40: ... 1050 (1030 - 1150) mm *90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm

*100-60: ... 1250 (1230 - 1350) mm

XL Corner base unit

1 drawer

1 door

1 shelf,



UE90-40-X UE90-45-X

UF100-60-X

1 angle filler Carcase widths: 900, 1000 mm UE100-50-X

Planning dimensions (variable): 650 (630 - 750) x ... *90-40: ... 1050 (1030 - 1150) mm

*90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1230 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UEDSA90-45-X UEDSA100-50-X UEDSA100-60-X

XL Corner unit with swivel pull-out

1 continuous door, 2 wooden swivel tablars with metal railing. height adjustable, 1 angle filler Carcase widths: 900, 1000 mm

Planning dimensions (variable): 650 (630 - 750) x ... *90-45: ... 1100 (1080 - 1200) mm

*100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm





UESA90-45-X UESA100-50-X UESA100-60-X

swivel pull-out 1 drawer.

1 door,

2 wooden swivel tablars with metal railing, height adjustable, 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions (variable):

650 (630 - 750) x ... *90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UESAV90-45-X UESAV100-50-X UESAV100-60-X

XL Corner unit with swivel pull-out

1 pinned door, 2 wooden swivel tablars with metal railing,

height adjustable, 1 angle filler Carcase widths: 900, 1000 mm

Planning dimensions (variable): 650 (630 - 750) x ... *90-45: ... 1100 (1080 - 1200) mm

*100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



Surcharge for recessed fillers


on fillers and half corner units, side panel made of carcase material. in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm

Base units in XL height

Carcase depth: 561 mm Carcase height: 792 mm

70, 100, 150 or 200 mm Plinth height:

XL Angle fillers



UPE-V-X

XL Angle filler

Continuous front material, 70 x 70 mm, Planning dimensions: 650 x 650 mm

as above however variable from 50 to 170 mm, Planning dimensions: 630 - 750 mm 1st dimension = left 2nd dimension = right



Surcharge for recessed fillers

on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly. carcase depth: 561 mm

XL Fillers / Panelling



XL Filler

Carcase material. 792 mm high, U-shaped seal for connection to wall, width: 100 / 200 mm

UPK*-X 10/20 cm



XL Front filler

Continuous front material. width: 200 mm

UPD*-X 20 cm



XL Base unit back panel 16 mm thick 792 mm high width: 250 - 2000 mm, available in all carcase and worktop décors from décor group 1,

Vario clip fastening, in case of reproduction finishes vertical wood grain



as above, however, continuous height, including floor profile: 70 mm plinth height:

882 mm 100 mm plinth height: 912 mm 150 mm plinth height: 962 mm 200 mm plinth height:

Available floor profile colours: 010 Black

014 Stainless steel appearance

1012 mm



XL Base unit back panel 1 continuous front,

789 mm high, Vario clip fastening, without drill holes

XL Cooker housings



XL Cooker housing

1 fixed panel. aperture dimension: 595 mm



XL Cooker housing

1 plastic drawer, 16 I capacity, interior dimensions: 485 x 480 x 68 mm aperture dimension: 595 mm



XL Cooker housing

1 large-capacity drawer with second level for baking trays, plastic, 30 I capacity, interior dimensions: 480 x 380 x 150 mm. aperture dimension: 595 mm

XL Hot plate units



141

XL Hot plate unit

1 internal panel, 1 construction shelf for heat insulation

1 door, 2 shelves



XL Hot plate unit

1 fixed panel, 1 construction shelf for heat insulation

1 door.

1 shelf



XL Hot plate unit

1 drawer 1 spacer shelf for hot plate, 1 door,

1 shelf



XL Hot plate unit

1 drawer,

1 spacer shelf for hot plate, 2 pull-outs

KS2A*-X 60/80/90/100/120 cm

XL-Doors for integrated appliances



Continuous XL door for fully integrated

dishwashers. built-under fridge and freezer units with pull-outs, includes spacer strip



Pinned XL door

for fully integrated dishwashers, built-under fridge and freezer units with pull-outs, includes spacer strip

XL Sink base units



XL Sink base unit

1 internal panel, 1 continuous door

SPUD*-X 40/45/50/60 cm



XL Sink base unit 1 fixed panel,

1 door

SPU*-X 40/45/50/60 cm



XL Sink base unit 2 internal panels.

2 continuous doors

SPUD*-X 80/90/100/120 cm



XL Sink base unit

2 fixed panels, 2 doors

SPU*-X 80/90/100/120 cm



XL Sink base unit

1 internal panel. 1 continuous front with centred handle. without pull-out rails and drill holes



XL Sink base unit

1 fixed panel. 1 front with centred handle, without pull-out rails and drill holes

XL Sink unit Separato-K

SPUA*-X 40/45/50/60 cm



8L 8L

450/500/600

45/50/60 cm

1 pull-out, 500 mm deep, with

1 internal panel,

waste separation system Separato-K with pull-out lid. 1 x 18 and 2 x 8 litres,

500 mm width: with 1 side organiser, 600 mm width: with 2 side organisers,

1 bio lid (for all widths)



45/50/60 cm

XL Sink unit Separato-K 1 fixed panel

1 pull-out, 500 mm deep, with waste separation system Separato-K

with pull-out lid. 1 x 18 and 2 x 8 litres, 500 mm width: with 1 side organiser, 600 mm width: with 2 side organisers, 1 bio lid (for all widths)



Worktops | Niche cladding

Worktops



APN 60/70/80/90/100/ 110/120 cm

Worktop APN with N-edge

rounded front edge, sides sealed with straight décor edge. Price per running 100 mm, every 100 mm started will be invoiced.

Max. length:

Décor group 1: 5100 mm. Décor group 2 (Xtra décors): 4000 mm Please quote the décor number in your order.



60/70/80/90/100/ 110/117 cm

Worktop APD with décor edge

front and side edges coated with straight décor edging material, 1.5 mm thick. Price per running 100 mm, every 100 mm started will be invoiced.

Max. length:

Décor group 1: 5100 mm, Décor group 2 (Xtra décors): 4000 mm Please quote the décor and edge colour number in your

Worktop processing



Surcharge for exterior and interior roundings deviating from the standard radii

AP-R



APN-A APN-AS APD-A

Surcharge for chamfered

on worktops and tables, including edging



AP-NF

Tongue and groove joint for worktop corners or extensions, incl. screw fittings. tongues and water resistant

glue



Cut-outs for built in hobs, sinks or ventilation grills

AP-AUS



Surcharge for inner corners in square design on worktops and tables with décor edge

AP-IEK

Niche cladding



NV 54 **NV 70**

Niche cladding coated on both faces, 16 mm thick, horizontal structure (except 226 Metal art décor and 274 Teramo marble reproduction) with edge on all sides, width: 250 - 2580 mm heights:

NV54 for niches beneath wall units NV70 for niches beneath cooker hoods

Price per started 100 mm.

NV 203

Niche cladding as above, however with deviating dimensions acc. to sketch max. 2580 mm wide, 2030 mm high, 1st dimension in direction of grain coated edge all round. Minimum price: 0.5 m², minimum dimensions: 250 x 200 mm,

invoiced per m2.

Accessories for niche cladding



NPUK 500

Plastic cover profile in translucent appearance for niche or back panel cladding, 16 mm thick, self-adhesive, 5000 mm long



WAPN 200/400/500 cm

Upstands for continuous planning with niche cladding

2-piece plastic profile with sealing lip, incl. vertical sealing profile dimensions: 25 mm high, 25 mm deep, delivered as strand material.

Available in:

014 Stainless steel appearance, 010 Black



WAPN-Z

WAPN accessory bag matches the plastic

upstands WAPN consisting of: 4 x interior corner 90° /

2 x interior corner 135° 2 x exterior corner 90° 2 x set of end caps for WAPN

2 x set of end caps for niche cladding

Available in:

014 Stainless steel appearance, 010 Black



NKPU 200 / 400

Niche profile on bottom Aluminium profile, 2-piece with sealing profile for niche and back panel

cladding or as upstand, dimensions: 17 mm high, 20 mm deep

Available in:

014 Stainless steel appearance, 010 Black



NKPO 200 / 400

Niche profile on top aluminium profile, stainless steel appearance for niche cladding incl. 1 set of end caps (left / right), dimensions: 16 mm high, 16 mm deep



NKP accessory bag matches upstand NKPU

Available in:

014 Stainless steel appearance, 010 Black



1 set of end caps matching aluminium profile for niche cladding NKPO

NKP-EK

Upright panels | Top shelves | Wall shelf units

Upright panels for base units



Upright at end of run incl. floor profile in 014 Stainless steel appearance or 010 Black, depth: 583 mm

Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm



Upright for room designs depth: 250 to 1166 mm, edged on both sides, incl. floor profile in 014 Stainless steel appearance or 010 Black

Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm

XL Upright panels for base units



XL Upright at end of run incl. floor seal in 014 Stainless steel appearance or 010 Black, depth: 583 mm

UWA*-X 10/16/25/50 mm

Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm



XL Upright for room designs depth: 250 to 1166 mm, edged on both sides, incl. floor seal in 014 Stainless steel appearance or 010 Black

UWR*-X 10/16/25/50 mm

Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm

Wall shelf units



WB25 30/40/45/50/55/ 60/65/70/80/90/ 100/110/120 cm Plug-in wall shelf, 25 mm thick Carcase material,

polymer edging all around, 255 mm deep, incl. metal plug fitting



VB16 100 cm

Wall shelf unit with shelf holders, 16 mm thick 255 mm deep, polymer edging all round, available in widths from 250 mm to 1000 mm, includes 2 shelf holders VBH5

VB16 258 cm

Wall shelf unit with shelf holders as above, however available in widths from 1001 mm to 2580 mm, includes 4 shelf holders VBH5

Available shelf holder colours: 010 Black 014 Stainless steel appearance

VB25 100 cm

Wall shelf unit with shelf holders, 25 mm thick 255 mm deep, polymer edging all round, available in widths from 250 mm to 1000 mm, includes 2 shelf holders VBH5

VB25 258 cm

Wall shelf unit with shelf holders as above, however available in widths from 1001 mm to 2580 mm, includes 4 shelf holders VBH5

Available shelf holder colours: 010 Black 014 Stainless steel

appearance



VB50 100 cm

Wall shelf unit with shelf holders, 50 mm thick 255 mm deep, polymer edging all round, available in widths from 250 mm to 1000 mm, includes 2 shelf holders VBH5

VB50 258 cm

Wall shelf unit with shelf holders as above, however available in widths from 1001 mm to 2580 mm, includes 4 shelf holders

includes 4 shelf holders VBH5

Available shelf holder colours: 010 Black 014 Stainless steel appearance

Upright panels for wall units



Upright at end of run / intermediate upright for wall units, height 1 depth: 372 mm, height: 720 mm

WW 10/16/25/50 mm **-1**



Upright at end of run / intermediate upright for wall units, height 2 depth: 372 mm, height: 792 mm

WW 10/16/25/50 mm **-2**



Upright at end of run / intermediate upright for wall units, height 3 depth: 372 mm, height: 864 mm

WW 10/16/25/50 mm -3

Top shelves



Top shelf, 10 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm



16 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm

Top shelf,

ADB25 38/59/117 cm

Top shelf, 25 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm



Top shelf, 50 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm

Highboards - 1582 / 1612 / 1662 / 1712 mm high

Carcase depth: 561 mm Carcase height: 1512 mm

70, 100, 150 oder 200 mm Plinth height:

XL Highboards – 1654 / 1684 / 1734 / 1784 mm high

XL Highboards

XL Highboard

1 fixed shelf,

2 doors,

3 shelves

Carcase depth: 561 mm Carcase height: 1584 mm

70, 100, 150 oder 200 mm Plinth height:



Highboards



Highboard

- 2 doors, 1 fixed shelf,
- 3 shelves

933

H*-X 30/40/50/60 cm

Housing for ovens



Oven housing aperture height: 590 mm

- 1 fixed compensation panel,
- 1 drawer
- 1 pinned door,
- 1 shelf

XL Housing for ovens



XL Oven housing aperture height: 590 mm

- 1 fixed compensation panel,
- 1 drawer.
- 1 door,
- 2 shelves

Integrated appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm

- 1 appliance door,
- 2 pull-outs

XL Integrated appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm 1 appliance door,

2 pull-outs

G88A-X

Integrated appliance housings with aperture height up to 1230 mm



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 internal panel,
- 1 appliance door,
- 1 drawer

XL Integrated appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 internal panel,
- 1 appliance door,
- 1 pull-out

Appliance housings with aperture height up to 1450 mm



Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 internal panel,
- 2 appliance doors

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm 2 appliance doors

G145-X

Fillers



Filler Carcase material, 1512 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK 20 cm


XL Fillers



XL Filler

Carcase material, 1584 mm high, U-shaped seal for connection to wall, width: 230 mm

Tall units, height 1 – 2086 / 2116 / 2166 / 2216 mm high Carcase depth: 561 mm 2016 mm Carcase height: 70, 100, 150 oder 200 mm Plinth height: Tall units Pantry unit







cushioned opening and closing SoftStoppPro. 5 hanging baskets with wooden bottoms and metal railing, adjustable



Larder unit 1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with wooden bottoms and metal railing, adjustable





Broom cupboard

- 1 door,
- 1 fixed shelf.
- 1 shelf 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials.
- 1 system shelf.
- 1 hose rack for vacuum
- cleaner,
- 2 pegboards



Appliance housing for ovens, microwaves, steam cookers, compact appliances



Oven housing aperture height: 590 mm

2 doors,

1 fixed compensation panel, 2 shelves

GO-1



Oven housing aperture height: 590 mm

- 2 doors.
- 1 fixed compensation panel,
- 1 drawer.
- 2 shelves

GOS-1



Oven housing aperture height: 590 mm

- 1 door.
- shelf.
- 1 fixed compensation panel,
- 1 drawer.
- 2 pull-outs

GOS2A-1



Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 2 doors.

- 1 fixed compensation panel,
- 1 shelf

GMO-1



Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 1 door,

- shelf.
- 1 fixed compensation panel, 1 pull-out

GMOA-1

357

429 VAR

573

GLO-1



Appliance housing for oven and microwave with lifting door

- aperture height: 370 mm aperture height: 590 mm
- 1 flap.
- 1 lifting door,
- 1 fixed compensation panel,
- 1 door.
- 1 shelf



Appliance housing for oven and microwave with lifting door aperture height: 370 mm

aperture height: 590 mm

- 1 flap.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 pull-outs

Appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors
- 1 appliance door,
- 2 shelves

G88-1



Appliance housing for integrated fridge aperture height: 880 mm

- 1 flap. 1 appliance door,
- 1 door
- 1 shelf



Appliance housing for integrated fridge aperture height: 880 mm 1 door.

- 1 shelf,
- 1 appliance door,
- 2 pull-outs

G88A-1

501

933 285

285

Appliance housings with aperture height up to 1230 mm



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 appliance door,
- 1 door
- 1 shelf

G123-1



Appliance housing for integrated fridge aperture height: 1230 mm 1 door.

- 1 internal panel,
- 1 appliance door,
- 1 pull-out

G123A-1



Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 shelf,
- 1 internal panel, 1 appliance door for
- freezer compartment, 1 appliance door for
- fridge section

Tall units, height 1 - 2086 / 2116 / 2166 / 2216 mm high


Carcase depth: 561 mm

Carcase height: 2016 mm
Plinth height: 70, 100, 150 oder 200 mm Plinth height:

Appliance housings with aperture height up to 1450 mm



Appliance housing for integrated fridge / freezer aperture height: 1450 mm 1 appliance door for freezer compartment, 1 appliance door for fridge section, 1 pull-out



Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm 2 appliance doors

GD194-1

Fillers / Cladding



Filler Carcase material, 2016 mm high, U-shaped seal for connection to wall, width: 230 mm



Front filler Continuous front material, width: 200 mm



Tall units in XL height, height 1 XL - 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm 2088 mm Carcase height:

70, 100, 150 oder 200 mm Plinth height:

XL Tall units



XL Pantry unit

- 3 doors, 2 fixed shelves,
- 4 shelves

H*-1X 30/40/50/60 cm



XL Pantry unit

- 2 doors,
- 1 fixed shelf,
- 5 shelves

HDV*-1X 30/40/50/60 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro. 6 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-1X 30/40 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-1X 30/40 cm



XL Broom cupboard

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials,
- HB*-1X 40/50/60 cm
- 1 system shelf,
- 1 hose rack for vacuum
- cleaner.
- 2 pegboards

<u>501</u> 933

XL Tall unit

- 1 door.
- 1 fixed shelf.
- 1 shelf,
- 1 lug connected door,
- 5 internal pull-outs

HI*-1X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances



XL Oven housing aperture height: 590 mm

- 2 doors,
- 1 fixed compensation panel,
- 3 shelves

GO-1X



XL Oven housing aperture height: 590 mm

- 2 doors.
- 1 fixed compensation panel,
- 1 drawer,
- 2 shelves

GOS-1X



XL Oven housing aperture height: 590 mm

- 1 shelf,
- 1 fixed compensation panel,
- 1 drawer,
- 2 pull-outs

GOS2A-1X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 2 doors.

- 1 fixed compensation panel,
- 1 shelf

GMO-1X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm

- 1 door, 1 shelf.
- 1 fixed compensation panel,
- 1 pull-out

GMOA-1X

GLO-1X

357 429 VAR 645

XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 flap,
- 1 lifting door,
- 1 fixed compensation panel,
- 1 door
- 1 shelf



XL Appliance housing for oven and microwave with lifting door

aperture height: 370 mm aperture height: 590 mm

- 1 flap.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 pull-outs

XL Appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors
- 1 appliance door,
- 2 shelves

G88-1X



XL Appliance housing for integrated fridge aperture height: 880 mm

- 1 appliance door,
- 1 door. 2 shelves



XL Appliance housing for integrated fridge aperture height: 880 mm

- 1 door. 1 shelf,
- 1 appliance door,
- 2 pull-outs
- G88A-1X

XL Appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 appliance door,
- 1 door
- 1 shelf

G123-1X



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 internal panel,
- 1 appliance door,
- 1 pull-out

G123A-1X



XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door
- 1 shelf,
- 1 internal panel,
- 1 appliance door for freezer compartment,
- 1 appliance door for

Tall units in XL height, height 1 XL - 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm

Carcase height: 2088 mm
Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf,
- 1 internal panel, 2 appliance doors

G145-1X



XL Appliance housing for 1 appliance door for 1 appliance door for

fridge section, 1 pull-out

G145A-1X

integrated fridge / freezer aperture height: 1450 mm freezer compartment,

HPD20-1X 20 cm

XL Fillers / Cladding



XL Filler Carcase material, 2088 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK20-1X 20 cm



XL Front filler Continuous front material, width: 200 mm

XL Appliance housings with aperture height between 1580 - 1940 mm



XL Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm 2 appliance doors

GD194-1X





Tall units, height 2 – 2158 / 2188 / 2238 / 2288 mm high Carcase depth: 561 mm 2088 mm Carcase height: 70, 100, 150 oder 200 mm

Tall units



Plinth height:

Pantry unit

- 3 doors, 2 fixed shelves.
- 4 shelves

H*-2 30/40/50/60 cm



Pantry unit


- 2 doors, 1 fixed shelf,
- 4 shelves

HDV*-2 30/40/50/60 cm



Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable
- HA*-2 30/40 cm



Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable
- HDA*-2 30/40 cm



Broom cupboard

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials.
- 1 system shelf,
- 1 hose rack for vacuum cleaner,
- 2 pegboards



Tall unit

- 1 door,
- 1 fixed shelf,
- 1 shelf
- 1 lug connected door,
- 5 internal pull-outs

HI*-2 40/50/60 cm

Appliance housing for ovens, microwaves, steam cookers, compact appliances



Oven housing aperture height: 590 mm

- 2 doors, 1 fixed compensation panel,
- 2 shelves

GO-2



Oven housing aperture height: 590 mm

- 2 doors,
- 1 fixed compensation panel,
- 1 drawer,
- 2 shelves

GOS-2



Oven housing aperture height: 590 mm

- 1 door
- 1 shelf
- 1 fixed compensation panel,
- 1 drawer.
- 2 pull-outs

GOS2A-2



Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 2 doors

- 1 fixed compensation panel,
- 1 shelf

GMO-2



Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm

- 1 door
- 1 shelf
- 1 fixed compensation panel,
- 1 pull-out

GMOA-2



Appliance housing for oven and microwave with lifting door aperture height: 370 mm

- aperture height: 590 mm 2 doors,
- 1 lifting door,
- 1 fixed compensation panel,
- 1 shelf



Appliance housing for oven and microwave with lifting door aperture height: 370 mm

- aperture height: 590 mm 1 door.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 pull-outs

Appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door,
- 2 shelves

G88-2

429

933

717

573

933 285

285



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors,
- 1 appliance door, 1 shelf

GD88-2



Appliance housing for integrated fridge aperture height: 880 mm 1 door

- 1 shelf,
- 1 appliance door, 2 pull-outs
- G88A-2

Appliance housings with aperture height up to 1230 mm



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 flap,
- 1 internal panel,
- 1 appliance door,
- 1 door,
- 1 shelf



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 shelf.
- 1 internal panel 1 appliance door,
- 1 pull-out

G123A-2



Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 1 appliance door for freezer compartment,
- 1 appliance door for fridge section

Tall units, height 2 - 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm

Carcase height: 2088 mm Plinth height: 70, 100, 150 oder 200 mm

Appliance housings with aperture height up to 1450 mm



Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 internal panel,
- 2 appliance doors

GD145-2



Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 shelf, 1 internal panel,
- 2 appliance doors,

G145-2

Fillers / Cladding



Filler

Carcase material, 2088 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK20-2 20 cm



Continuous front material, width: 200 mm

HPD20-2 20 cm

Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1780 mm

- 2 appliance doors

GD178-2



Tall units in XL height, height 2 XL - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm 2160 mm Carcase height:

70, 100, 150 oder 200 mm Plinth height:

XL Tall units



XL Pantry unit

- 3 doors,
- 2 fixed shelves. 4 shelves
- H*-2X 30/40/50/60 cm




XL Pantry unit

- 2 doors,
- 1 fixed shelf.
- 5 shelves
- HDV*-2X 30/40/50/60 cm



XL Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable
- HA*-2X 30/40 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-2X 30/40 cm



XL Broom cupboard

- 1 door,
- 1 fixed shelf, 1 shelf,
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials.
- 1 system shelf,
- 1 hose rack for vacuum cleaner,
- 2 pegboards



XL Tall unit

- 1 door,
- 1 fixed shelf,
- 1 shelf.
- 1 lug connected door.
- 5 internal pull-outs

HI*-2X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances



XL Oven housing aperture height: 590 mm

- 2 doors,
- 1 fixed compensation panel, 3 shelves
- GO-2X



XL Oven housing aperture height: 590 mm

- 2 doors,
- 1 fixed compensation panel,
- 1 drawer,
- 2 shelves

GOS-2X



XL Oven housing aperture height: 590 mm

- 1 door
- 1 shelf
- 1 fixed compensation panel,
- 1 drawer.
- 2 pull-outs

GOS2A-2X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 2 doors

- 1 fixed compensation panel,
- 1 shelf

GMO-2X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm

- 1 door
- 1 fixed compensation panel, 2 pull-outs

GMO2A-2X



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm

- aperture height: 590 mm 2 doors,
- 1 lifting door,
- 1 fixed compensation panel,
- 1 shelf



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 door.
- 1 lifting door,
- 1 fixed compensation panel, 2 pull-outs

XL Appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
 - 1 appliance door, 2 shelves
- G88-2X



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors, 1 appliance door,
- 2 shelves

GD88-2X



XL Appliance housing for integrated fridge aperture height: 880 mm 1 door

- 1 shelf,
- 1 appliance door, 2 pull-outs

G88A-2X

XL Appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 flap,
- 1 internal panel,
- 1 appliance door,
- 1 door,
- 1 shelf

501 1293

XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 shelf.
- 1 internal panel 1 appliance door,
- 1 pull-out

G123A-2X



XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 1 appliance door for freezer compartment,
- 1 appliance door for fridge section

Tall units in XL height, height 2 XL - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm

Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 internal panel,
- 2 appliance doors

GD145-2X



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 shelf,
- 1 internal panel, 2 appliance doors
- G145-2X

XL Appliance housings with aperture height between 1580 - 1940 mm 213 XL Appliance housing for fridge / freezer

aperture height: 1780 mm 1 flap,

2 appliance doors

GD178-2X

<u>1149</u>

XL Fillers / Cladding



XL Filler Carcase material,

2160 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK20-2X 20 cm



XL Front filler


Continuous front material, width: 200 mm







Tall units, height 3 – 2230 / 2260 / 2310 / 2360 mm high Carcase depth: 561 mm 2160 mm Carcase height: 70, 100, 150 oder 200 mm Plinth height: Tall units




717 HDV*-3 30/40/50/60 cm



645

933

573







2 pegboards




Appliance housing for ovens, microwaves, steam cookers, compact appliances



















Appliance housings with aperture height up to 880 mm



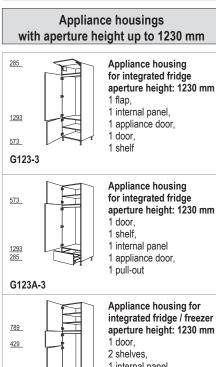



Tall units, height 3 - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm

Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm

Appliance housings with aperture height up to 1450 mm

<u>501</u> 933 <u>717</u>

Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf,
- 1 internal panel, 2 appliance doors

GD145-3



Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf,
- 1 internal panel, 2 appliance doors,
- G145-3

Fillers / Cladding



Filler

Carcase material, 2160 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK20-3 20 cm



Continuous front material, width: 200 mm

HPD20-3 20 cm

Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1780 mm

- 2 appliance doors





Tall units in XL height, height 3 XL - 2302 / 2332 / 2382 / 2432 mm high

Carcase depth: 561 mm 2232 mm Carcase height:

70, 100, 150 oder 200 mm Plinth height:

XL Tall units



XL Pantry unit

- 3 doors, 2 fixed shelves.
- 4 shelves


H*-3X 30/40/50/60 cm



XL Pantry unit


- 2 doors,
- 1 fixed shelf.
- 5 shelves

HDV*-3X 30/40/50/60 cm



XL Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with wooden bottoms and metal railing, adjustable,
- 1 fixed shelf



XL Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with wooden bottoms and metal railing, adjustable, 1 fixed shelf
- HDA*-3X 30/40 cm

645

933

645



HB*-3X 40/50/60 cm

XL Broom cupboard

- 1 door,
- 1 fixed shelf, 1 shelf
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials,
- 1 system shelf,
- 1 hose rack for vacuum cleaner.
- 2 pegboards



XL Tall unit

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door.
- 5 internal pull-outs

HI*-3X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances



XL Oven housing aperture height: 590 mm

- 2 doors, 1 fixed compensation panel,
- 4 shelves

GO-3X



XL Oven housing aperture height: 590 mm

- 2 doors,
- 1 fixed compensation panel,
- 1 drawer,
- 3 shelves

GOS-3X



XL Oven housing aperture height: 590 mm

- 1 door
- 2 shelves
- 1 fixed compensation panel, 1 drawer.
- 2 pull-outs

GOS2A-3X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 2 doors.

- 1 fixed compensation panel,
- 2 shelves

GMO-3X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm

- 1 door.
- 1 shelf.
- 1 fixed compensation panel,
- 1 pull-out

GMOA-3X

GLO-3X



XL Appliance housing for oven and microwave with lifting door

- aperture height: 370 mm aperture height: 590 mm 2 doors.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 shelves



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm

- aperture height: 590 mm door.
- 1 shelf
- 1 lifting door,
- 1 fixed compensation panel,
- 2 pull-outs

XL Appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door,
- 2 shelves

G88-3X



XL Appliance housing for integrated fridge aperture height: 880 mm 2 doors,

- 1 appliance door,
- 3 shelves

GD88-3X



XL Appliance housing for integrated fridge aperture height: 880 mm 1 door

- 1 shelf,
- 1 appliance door, 2 pull-outs

G88A-3X

XL Appliance housings with aperture height up to 1230 mm



- XL Appliance housing for integrated fridge aperture height: 1230 mm
- 1 flap,
- 1 internal panel,
- 1 appliance door,
- 1 door, 1 shelf

573 <u>1293</u> 357

XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 1 appliance door,
- 1 pull-out

G123A-3X



XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door,
- 2 shelves,
- 1 internal panel,
- 1 appliance door for freezer compartment,
- 1 appliance door for fridge section

Tall units in XL height, height 3 XL - 2302 / 2332 / 2382 / 2432 mm high

Carcase depth: 561 mm

Carcase height: 2232 mm
Plinth height: 70, 100, 150 oder 200 mm Plinth height:

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf,
- 1 internal panel,
- 2 appliance doors

645 933

XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf,
- 1 internal panel,
- 2 appliance doors,

G145-3X

645

HPK20-3X 20 cm

XL Front filler

XL Fillers / Cladding

XL Filler

Carcase material, 2232 mm high,

U-shaped seal for

connection to wall,

width: 230 mm

Continuous front material, width: 200 mm



HPD20-3X 20 cm

XL Appliance housings with aperture height between 1580 - 1940 mm



XL Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm 2 appliance doors

GD194-3X





Wall units 360 mm high

Carcase depth: 350 mm Carcase height: 360 mm

Wall units 360 mm high



Wall unit 1 door

W*-36 45/50/60 cm



Wall unit with flap door 1 flap, opening angle 107°

WK*-36 45/50/60/80/90/100/ 120 cm



WKG*-36 50/60/80/90/100/ 120 cm Wall unit with framed glass flap door

of the state of th

No image

MP-GW

Surcharge for different glass choice for glass variants:

for glass variants: No. 02 Matt glass No. 39 Black glass

Wall units 360 mm high



WKSQ*-36 50/60/80/90/100/ 120 cm

Wall unit with glass doors Square

1 aluminium framed flap, opening angle 107°, handleless version with wall unit bottom shelf with attached profile strip in stainless steel appearance

Available in:

No. 321 Aluminium framed front in stainless steel appearance with 02 Matt glass No. 308 Aluminium framed front in stainless steel appearance with 035 Grey glass No. 329 Aluminium framed front in Black with 39 Black glass

Open shelf wall unit side depth: 371 mm



WR*-36 30/40/45/50/60/80/90/ 100/120 cm

Fillers



Filler
Carcase material,
360 mm high,
U-shaped seal for
connection to wall,
width: 100 mm / 200 mm




20 cm

Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm



Wall units 576 mm high

Carcase depth: 350 mm Carcase height: 576 mm





Wall unit

1 door, 1 shelf

W*-58

20/30/35/40/45/50/60 cm



W2T-58 60 cm

W*-58 80/90/100/120 cm



Wall unit

2 doors hinged parallel. . 1 shelf

W2TP*-58 80/90/100 cm




Wall unit

1 folding door with slide mechanism, 1 shelf

WFT60-58

60 cm

Wall units 576 mm high



Wall unit, folding/lifting

1 folding/lifting door, 2 original fronts, 1 shelf

WFL*-58 50/60/80/90/100/120 cm



Wall unit for microwave

1 aperture depending on appliance height, 1 flap as niche compensation

WM*-58 50/60 cm



Corner wall unit, diagonal

1 door: 394 mm wide, opening angle 90°, 1 shelf, Planning dimensions: 650 x 650 mm

Wall units 576 mm high



WE60-20-58

WE80-35-58

WE90-45-58

Corner wall unit

1 door, 1 angle filler, 1 shelf

Carcase widths: 600, 782, 882 mm

Planning dimensions (variable): 450 (390 - 500) x ...

WE60-20: ...650 (630 - 700) mm WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm



Open shelf wall unit

1 fixed shelf. side depth: 371 mm

WR*-58 15/20/30/40/45/50/60 cm



Wall unit as bottle rack

3 fixed shelves, side depth: 371 mm

WRF15-58 15 cm

Fillers



Filler

Carcase material, 576 mm high, U-shaped seal for connection to wall, width: 100 mm / 200 mm

WPK*-58 10/20 cm



Front filler


Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm

20 cm

Wall units, height 1 - 720 mm high

Carcase depth: 350 mm Carcase height: 720 mm

Wall units 720 mm high



Wall unit

1 door, 2 shelves

W*-1

20/25/30/35/40/45/50/55/60 cm



Wall unit 2 doors. 2 shelves

W2T-1 60 cm W*-1 80/90/100 cm



Wall unit 2 doors hinged parallel. 2 shelves

W2TP*-1 80/90/100 cm



Wall unit

1 folding door with slide mechanism, 2 shelves



WG*-1 45/50/60 cm

60 cm

Wall unit, framed glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WG*-1 90/100 cm Wall unit, framed glass door 2 doors,

clear glass No. 01. 2 glass shelves, glass variants against surcharge: no. 02 / 39



WGLS*-1 45/50/60 cm Wall unit, segmented glass door 1 door

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

Wall units 720 mm high



WGLS*-1 90/100 cm Wall unit. segmented glass door

2 doors, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

No image MP-GW

Surcharge for different glass choice

for glass variants: No. 02 Matt glass No. 39 Black glass



Wall unit, folding/lifting door

1 folding/lifting door, 2 original fronts, 2 shelves

WFL*-1 50/60/80/90/100/120 cm



WFI G*-1 50/60/80/90/100/120 cm Wall unit, folding/lifting door

folding/lifting door, 1 top original front, 1 bottom framed glass front, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



50/60 cm

Wall unit for microwave

1 aperture depending on appliance height, 1 flap as niche compensation



Corner wall unit, diagonal

1 door: 394 mm wide, opening angle 90°, 2 shelves, Planning dimensions: 650 x 650 mm



WE*-1 60/65/80/90 cm

Corner wall unit 2 doors with 165° hinges, 2 shelves. hinged side = first

door to be opened

Wall units 720 mm high



WE60-20-1 WE80-35-1 WE90-45-1 Corner wall unit

1 door. 1 angle filler, 2 shelves Carcase widths: 600, 782, 882 mm

Planning dimensions (variable): 450 (390 - 500) x ... WE60-20: ...650 (630 - 700) mm

WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm



Open shelf wall unit

2 fixed shelves, side depth: 371 mm

WR*-1 15/20/30/40/45/50/60 cm



Wall unit as bottle rack 4 fixed shelves, side depth: 371 mm

WRF15-1 15 cm

Fillers



Filler Carcase material, 720 mm high, U-shaped seal for connection to wall width: 100 mm / 200 mm



Front filler

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep. width: 200 mm

Wall units, height 2 - 792 mm high

Carcase depth: 350 mm Carcase height: 792 mm

Wall units 792 mm high



Wall unit

1 door, 2 shelves

W*-2 20/25/30/35/40/45/50/55/60 cm



Wall unit

2 doors, 2 shelves

W2T*-2 60 cm **W*-2** 80/90/100 cm



Wall unit

2 doors hinged parallel, 2 shelves

W2TP*-2 80/90/100 cm



Wall unit

1 folding door with slide mechanism, 2 shelves

WFT60-2 60 cm



Wall unit,

framed glass door 1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

WG*-2 45/50/60 cm



WG*-2 90/100 cm

WGLS*-2

45/50/60 cm

Wall unit, framed glass door

2 doors, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



Wall unit,

segmented glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WGLS*-2 90/100 cm

Wall unit, segmented glass door 2 doors,

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

No image

MP-GW

Surcharge for different glass choice

glass choice for glass variants: No. 02 Matt glass No. 39 Black glass

Wall units 792 mm high



Wall unit for microwave

1 aperture depending on appliance height, 1 flap as niche compensation

WM*-2 50/60 cm



Corner wall unit, diagonal

1 door: 394 mm wide, opening angle 90°, 2 shelves, Planning dimensions: 650 x 650 mm



Corner wall unit

2 doors with 165° hinges, 2 shelves, hinged side = first door to be opened

WE*-2 60/65/80/90 cm



Corner wall unit

1 door, 1 angle filler, 2 shelves <u>Carcase widths:</u> 600, 782, 882 mm

WE60-20-2 WE80-35-2 WE90-45-2

Planning dimensions (variable): 450 (390 - 500) x ...

WE60-20: ...650 (630 - 700) mm WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm



Open shelf wall unit 2 fixed shelves,

2 fixed shelves, side depth: 371 mm


WR*-2 15/20/30/40/45/50/60 cm



15 cm

Wall unit as bottle rack 4 fixed shelves, side depth: 371 mm


Wall units 792 mm high



Wall unit, folding/lifting door

1 folding/lifting door, 2 original fronts, 2 shelves

WFL*-2 50/60/80/90/100/120 cm



Wall unit, folding/lifting door

1 folding/lifting door, 1 top original front,

1 bottom framed glass front, clear glass No. 01,

clear glass No. 01, 2 glass shelves, glass variants against

WFLG*-2 glass variants against 50/60/80/90/100/120 cm surcharge: no. 02 / 39

Fillers



Filler

Carcase material, 792 mm high, U-shaped seal for connection to wall, width: 100 mm / 200 mm

WPK*-2 10/20 cm



Front filler

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm

Wall units, height 3 - 864 mm high

Carcase depth: 350 mm Carcase height: 864 mm

Wall units 864 mm high



Wall unit

1 door. 2 shelves

W*-3 20/25/30/35/40/45/50/55/60 cm



Wall unit

2 doors. 2 shelves

W2T*-3 60 cm W*-3 80/90/100 cm



Wall unit 2 doors hinged

parallel. 2 shelves

W2TP*-3 80/90/100 cm



Wall unit

1 folding door with slide mechanism, 2 shelves

WFT60-3 60 cm



WG*-3 45/50/60 cm Wall unit, framed glass door 1 door,

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WG*-3 90/100 cm

Wall unit, framed glass door 2 doors.

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



segmented glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WGLS*-3 90/100 cm

WGLS*-3

45/50/60 cm

segmented glass door 2 doors,

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

No image

Surcharge for different

MP-GW

glass choice for glass variants: No. 02 Matt glass No. 39 Black glass

Wall units 864 mm high



Wall unit for microwave

1 aperture depending on appliance height, 1 door as niche compensation, 1 shelf

WM*-3 50/60 cm



Corner wall unit, diagonal

1 door: 394 mm wide, opening angle 90°, 2 shelves, Planning dimensions: 650 x 650 mm



Corner wall unit 2 doors with 165° hinges, 2 shelves. hinged side = first door to be opened

Corner wall unit

WF*-3 60/65/80/90 cm



1 door,

1 angle filler, 2 shelves Carcase widths: 600, 782, 882 mm Planning dimensions

WE60-20-3 WE80-35-3 WE90-45-3

(variable): 450 (390 - 500) x .. WE60-20: ...650 (630 - 700) mm WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm



Open shelf wall unit 2 fixed shelves side depth: 371 mm

WR*-3 15/20/30/40/45/50/60 cm



Wall unit as bottle rack 5 fixed shelves, side depth: 371 mm, width: 150 mm

WRF15-3 15 cm

Wall units for cooker hoods

Wall units for cooker hoods



Wall unit for slimline cooker hoods

internal panel, metal grids, 80 mm deep, the number of metal grids depends on the built-in dimensions of the cooker hood

WDAF60-58 60 cm

height: 576 mm

WDAF60-1 60 cm

height: 720 mm


WDAF60-2 60 cm

height: 792 mm

WDAF60-3 60 cm

height: 864 mm

Bridging shelf




Bridging shelf in carcase material

laminated on both faces in the same colour, 16 mm thick, 350 mm deep, with edging material on 3 sides, for fitting between wall units or as a window bridging. Price per running 100 mm, invoiced per started 100 mm. Width: 250 - 2580 mm

WZB60

Bridging shelf in carcase material as above, however 600 mm wide

Fillers



Filler

Carcase material, 864 mm high, U-shaped seal for connection to wall. width: 100 mm / 200 mm



20 cm

Front filler

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep width: 200 mm

Accessories


Plastic cutlery trays and pull-out organisers



BE* 30/40/45/50/60/80/ 90/100/120 cm

Cutlery tray Trend

grey, height: 43 mm, fits drawer depth of 500 mm, side depth: 561 mm



BE* -46 45/50/60/80/90/ 100/120 cm

as above, however for drawer depth 400 mm, side depth: 461 mm






BE* M 30/40/45/50/60/80/ 90/100/120 cm


Cutlery tray Move

silver-grey, with dividers for customisable divisions, height: 47 mm, fits drawer depth of 500 mm, side depth: 561 mm



BE* -46 M 30/40/45/50/60/80/ 90/100/120 cm

as above, however for drawer depth 400 mm, side depth: 461 mm





AUO 56

Universal organiser

Alu profile with 4 dividers for individualised divisions, height: 125 mm, fits pull-out depth of 500 mm, side depth: 561 mm,
1 alu profile of 600 mm width,

2 alu profiles of 800 up to 900 mm width, 3 alu profiles of 1000 up to 1200 mm width

Please order the correct number for the unit width!

AUO 46


as above, however for pull-out depth 400 mm, side depth: 461 mm



BE* C 30/40/45/50/60/80/ 90/100/120 cm

Cutlery tray Concept

Non-slip soft touch surface, anthracite, height: 52 mm, fits drawer depth of 500 mm, side depth: 561 mm






AO* C 60/80/90/100/120 cm

Pull-out organisation concept

Non-slip soft touch surface, anthracite, height: 100 mm, fits pull-out depth of 500 mm, side depth: 561 mm



Accessories


Plastic cutlery trays and pull-out organisers



BE* BE 30/40/45/50/60/80/ 90/100/120 cm








Black ash cutlery trays and pull-out organisers




30/40/45/50/60/80/ 90/100/120 cm



solid ash wood, stained black, height: 56 mm, fits drawer depth of 500 mm, side depth: 561 mm







BE-MVGS* N 80/90/100/120 cm

Black ash wood cutlery tray with knife block, storage containers and insert for spice mills and shakers

Design in solid ash wood, stained black, incl. 5 knives, 6 storage containers, 3 spice mills, 3 shakers, height: 56 mm, fits drawer depth 500 mm, side depth: 561 mm







AO* N 60/80/90/100/120 cm

Universal organiser, black ash

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 8 solid wood partitions in ash for 600 mm width, incl. 16 solid wood partitions in ash for 800/900/1000 mm width, incl. 24 solid wood partitions in ash for 1200 mm width

black editio**n**



Universal organiser, black ash

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 7 solid wood partitions in ash for 600 mm width, incl. 10 solid wood partitions in ash for 800/900/1000 mm width, incl. 13 solid wood partitions in ash for 1200 mm width



AOS* N 60/80/90/100/120 cm







Accessories


Beech cutlery trays and pull-out organisers



Beech wood cutlery tray

solid beech wood, height: 56 mm, fits drawer depth of 500 mm, side depth: 561 mm

BE* H 30/40/45/50/60/80/ 90/100/120 cm





AOS* H

60/80/90/100/120 cm

Beech wood universal organiser

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm,

incl. 7 solid wood partitions in beech for 600 mm width, incl. 10 solid wood partitions in beech for 800 / 900 / 1000 mm width,

incl. 13 solid wood partitions in beech for 1200 mm width

Oak cutlery trays and pull-out organisers




BEHS* E 40/45/50/60/80/90/ 100/120 cm

Oak wooden segment cutlery tray solid wood design in oak, with anti-slip mat in anthracite,

height: 55 mm, segment width: 274 mm, fits drawer depth of 500 mm,


side depth: 561 mm,

one wooden segment is delivered up to a width of 600 mm, for widths exceeding 800 mm, two wooden segments are delivered



BEHS* -46 E 40/45/50/60/80/90/ 100/120 cm

as above, however for drawer depth 400 mm, side depth: 461 mm





AOS* E 60/80/90/100/120 cm

Universal organiser, oak

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm,

side depth: 561 mm,

incl. 7 solid wood partitions in oak for 600 mm width,

incl. 10 solid wood partitions in oak for 800 / 900 / 1000 mm width,

incl. 13 solid wood partitions in oak for 1200 mm width





Mounting sets



MONSET 1

Mounting set 1

consisting of:

- 1 ball siphon 1 1/2" with 40 mm drain white
- 1 space-saving connector white
- 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut



MONSET 2

Mounting set 2

consisting of:

- 1 ball siphon 1 1/2" with 40 mm drain white
- 1 space-saving connector white 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut
- 1 hose clip, 16 25 mm
- 1 table socket, triple, sockets model F, with contact protection, white with 1500 mm supply line, 3 x 1.5 mm²

Accessories for sink units



FR* 40/45/50/60/80/90/ 100/120 cm

Moisture protection sheet

aluminium sheet, serrated, for sink base units, cannot be used with front pull-outs. fits only for a side depth of 561 mm

FB90: also fits corner sink units SPUE(D)90-45(-X) and NSPUE90-45(-X)

FB100: also fits corner sink units SPUE(D)100-50(-X) and NSPUE100-50(-X)



WSMS*

40/45/50/60/80/90/ 100/120 cm

Waterproof mat

plastic, slate grey, for sink base units, not for use with front pull-outs, fits only side depth of 561 mm

Not possible in conjunction with hose and cable feed-through SKD or with opening support mechanism Libero AOUI



WSMP* 60/80 cm

Waterproof mat Pro for sink units

Slate grey plastic,

for preventing water damage in sink units not suitable for front pull-outs, only suitable for 561 mm side depth

Upstands



WAP

200/400/500 cm

Lenath 2000 mm Length 4000 mm

Special length 5000 mm

Plastic upstand

Top section with sealing lips, dimensions: 25 mm high, 25 mm deep, delivered as strand material.

Available in all worktop décors, also available in:

No. 014 Stainless steel appearance



WAP-7

WAP accessory bag

matches the plastic upstands WAPN consisting of:

- 4 x interior corner 90°
- 2 x interior corner 135°
- 2 x exterior corner 90°
- 2 x set of end caps



WAPN

200/400/500 cm

Length 2000 mm

Length 4000 mm

Special length 5000 mm

Upstands for continuous planning with niche cladding

2-piece plastic profile with sealing lip, incl. vertical sealing profile dimensions: 25 mm high, 25 mm deep

delivered as strand material.

014 Stainless steel appearance, 010 Black

Bottom profile adds 4 mm to the worktop.



WAPN-Z

WAP accessory bag

matches the plastic upstands WAPN consisting of:

- 4 x interior corner 90° / 2 x interior corner 135°
- 2 x exterior corner 90°
- 2 x set of end caps for WAPN
- 2 x set of end caps for niche cladding

Available in:

014 Stainless steel appearance, 010 Black

Waste collecting systems

Waste collecting systems (fitted on bottom shelf behind hinged door)



Built-in waste collector "Solo"

plastic, slate grey, with full pull-out, capacity: 20 litres, Built-in dimensions: $h \times w \times d = 396 \times 245 \times 427$ mm To be fitted on site onto the bottom shelf.

Can be built-in upwards of 300 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS9430



Built-in waste collector "Tandem" as a full pull-out

with 2 bins for ecological waste separation, with mechanical pull-out and lid lifting system, dimensions: $h \times w \times d = 415 \times 250 \times 480$ mm. Volume: 2×15 l. To be fitted on site onto the bottom shelf.

Can be built-in upwards of 300 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS4311



Built-in waste collector Bio-Trio 30 DT

With 3 plastic bins, Orion grey, for odourless, ecological waste separation, plastic parts Orion grey, capacity: 3×10 litres, incl. bio lid, $h \times w \times d = 385 \times 254 \times 475$ mm To be fitted on site onto the bottom shelf.

Can be built-in upwards of 300 mm door width.

Take sink syphon into account and plan space saving connector 021!



Built-in waste collector "space saving Tandem"

sorting in 3 bins: volume: 1 x 18 I, 2 x 8.5 I, 1 additional bio lid, h x w x d = 320 x 336 x 471 mm

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS4742



Built-in waste collector "space saving Tandem S"

sorting in 3 bins: volume: 1 x 12 l, 2 x 8.5 l, 1 additional bio lid, h x w x d = 347 x 434 x 330 mm

Can be built-in upwards of 500 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS9431



Waste collector 40 DT

2 plastic bins, Orion grey, for ecological waste separation, capacity: 2 x 16 l, h x w x d = $320 \times 338 \times 475$ mm To be fitted on site onto the bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

Waste collecting systems

Waste collecting systems (pull-outs, fitted to the front)



Built-in waste collector "Syncro"

Fully synchronised pull-out rails, with over extension runner, cushioned and covered, metal and plastic parts in slate grey.

h x d: 424 x 400 mm Contents: 2 x 18 litres

Matching sink units: SPUA(D)45(-X) / SPUA45(-M) / NSPUAL45(-X)!

AS3550

AS3551 as above, however, with the following contents:

1 x 18 l, 2 x 13 l, 1 additional bio lid

Matching sink units: SPUA(D)50(-X) / SPUA50(-M) / NSPUAL50(-X)!

AS3552 as above, however, with the following contents:

2 x 28

Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!

AS3553 as above, however, with the following contents:

1 x 28 l, 2 x 13 l, 1 additional bio lid

Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!



Built-in waste collector "X-Line" X45 M35 Basic

35-litre large container with cover frame with flexible bin liner clamping system, suitable for 35-litre waste bags, Basic drawer as partial pull-out,

h x w x d: 393 x 418 x 368 mm

Matching sink units: SPUA(D)-BW45/SPUA(D)K-BW45(-X) and NSPUA(K)-BW45(-X)!

AS9426

AS9428 Built-in waste collector "X-Line" X50 M35 Basic

as above, but

h x w x d: 393 x 468 x 368 mm

Matching sink units: SPUA(D)-BW50/SPUA(D)K-BW50(-X) and NSPUA(K)-BW50(-X)!



Built-in waste collector "X-Line" X60 M7 Basic

as above, but with additional 15 litre container with lid,

h x w x d: 393 x 568 x 368 mm

Matching sink units: SPUA(D)-BW60/SPUA(D)K-BW60(-X) and NSPUA(K)-BW60(-X)!

AS9429



Built-in waste collector "X-Line" X60 M5 Basic

as above, but with additional base tray that can be placed on the left or right 8- and 5-litre container with lid,

h x w x d: 393 x 568 x 368 mm

Matching sink units: SPUA(D)-BW60/SPUA(D)K-BW60(-X) and NSPUA(K)-BW60(-X)!

Waste collecting systems

Waste collecting systems (fitted to hinged door)



Built-in waste collector, silver-coloured

made of metal with removable plastic waste bins, lid and rims are black plastic, right-hand side or left-hand side mounting, no load on door hinges, 13 I capacity. Lid automatically lifts upon opening door. Dimensions: h x w x d = 470 x 340 x 285 mm Please note: Only mount waste collector on side wall with door hinge or on centre stile with

Can be built-in upwards of 400 mm door width.

AS9441



Built-in waste collector

corner sink units.

flat design, 19 I volume container. Installation dimensions: h x w x d = 470 x 410 x 210 mm. Please note! Waste container only to be fitted to the side wall with door fittings, or to the centre post of corner sink units. In case of corner sink units, the adapter, order No. 9465 (to be fitted to the centre post) is required.

Can be built-in upwards of 450 mm door width.

AS9449



Econtainer Junior, double waste collector

flat design, with two 10 I and 19 I bins. Dimensions: h x w x d = 470 x 460 x 400 mm.

Please note! Waste connector can only be fitted to the side panel with door fittings,

or to the centre post of corner sink units.

In case of corner sink units the adapter, order No. 9465 (to be fitted to the centre post) is required.

Can be built-in upwards of 500 mm door width.

Front bin fits underneath the sink connections, order space saving adapter 021.

AS9440




Built-in waste collector "Euro Flexx"

35 I large container with cover frame and bin liner clamping system, fits 1 x 35 l or 2 x 17 l, lid with indentation can be mounted on the right or left $h \times w \times d = 499 \times 370 \times 356 \text{ mm}$

Can be built-in upwards of 450 mm door width.

AS9450



Adapter for corner sink base units with centre post, galvanised

suitable for all Econtainers and 9449 / 9440 waste collectors.


Please note! Observe door widths to be sufficient to allow the installation of waste collectors.


Screw the adapter to the centre post, and then fasten the waste collector holder.


ASZ9465

Dimensional drawings | Height grid


Height grid, carcase heights










Height grid, XL carcase heights









Height grid, standard and maxi door dimensions

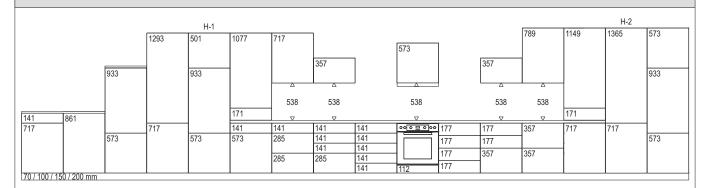




Dimensional drawings | Height grid


Height grid, XL door dimensions, Height 1

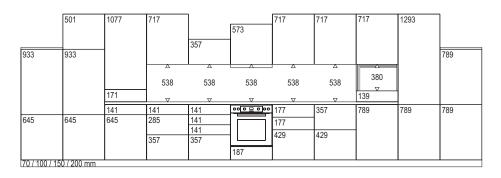


Height grid, XL door dimensions, Height 2

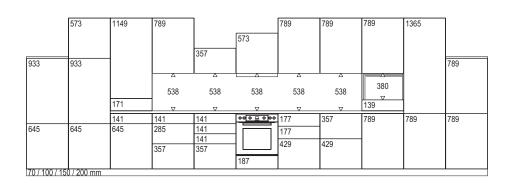

Height grid, XL door dimensions, Height 3

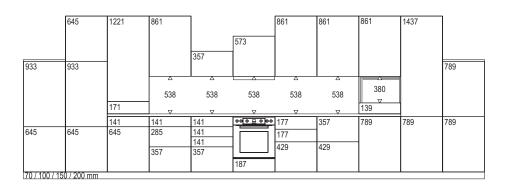

Height grid, tall units



Minimum room heights

A* B*	70 mm	100 mm	150 mm	200 mm
2016 mm	2147 mm	2176 mm	2224 mm	2273 mm
2088 mm	2217 mm	2246 mm	2295 mm	2343 mm
2160 mm	2287 mm	2316 mm	2365 mm	2414 mm
2232 mm	2357 mm	2386 mm	2435 mm	2484 mm

A* = Tall unit height B* = Plinth height

Kurztypenliste 2024

